

275C Series

600lbs Electromagnetic Lock

Model **UL275C-S (Unmonitored Version)**

UL275C-SP (Unmonitored Version - LED with indicating lamp only)



Description

600lbs EM locks were designed to meet fire/life safety applications by providing an auxiliary locking mechanism that has no moving parts to bind or wear out for trouble free operation. This will ensure inhibited release at all times where they have become extremely prevalent in applications other than fire/life safety.

Suitable for access controlled & secure areas within buildings.

Standard Features



Life Safety
Applications




No Residual



Low Energy
Consumption



Cost Savings




12Vdc

Extended Features

(Optional)

- Anodized Aluminium Housing
- CE Compliance
- Versatile Mountings
- Door Status Monitoring
- LED Indicator Lamp

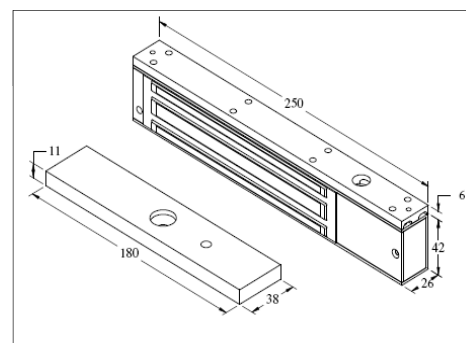

Specification

	UL275C-S / UL275C-SP
Magnet Size	250 X 42 X 26 mm
Armature Size	180 X 38 X 11 mm
Holding Force	Up to 600lbs
Current Drain	Less than 420mA / 12Vdc only
Temperature	(-10 to 55)°C (14 to 131)°F
Weight	2.0kg

WARRANTY:- Algatec EM Lock are warranted against defects in material and workmanship while used in normal service for a period of 5 years from the date of sale to the original customer.

DISCALIMER:- Specifications are subject to change without prior notice.

